




SIAT

M. J. MAILLIS GROUP

SM11 / SM116

Automatic Uniform Size Carton Sealing Machine

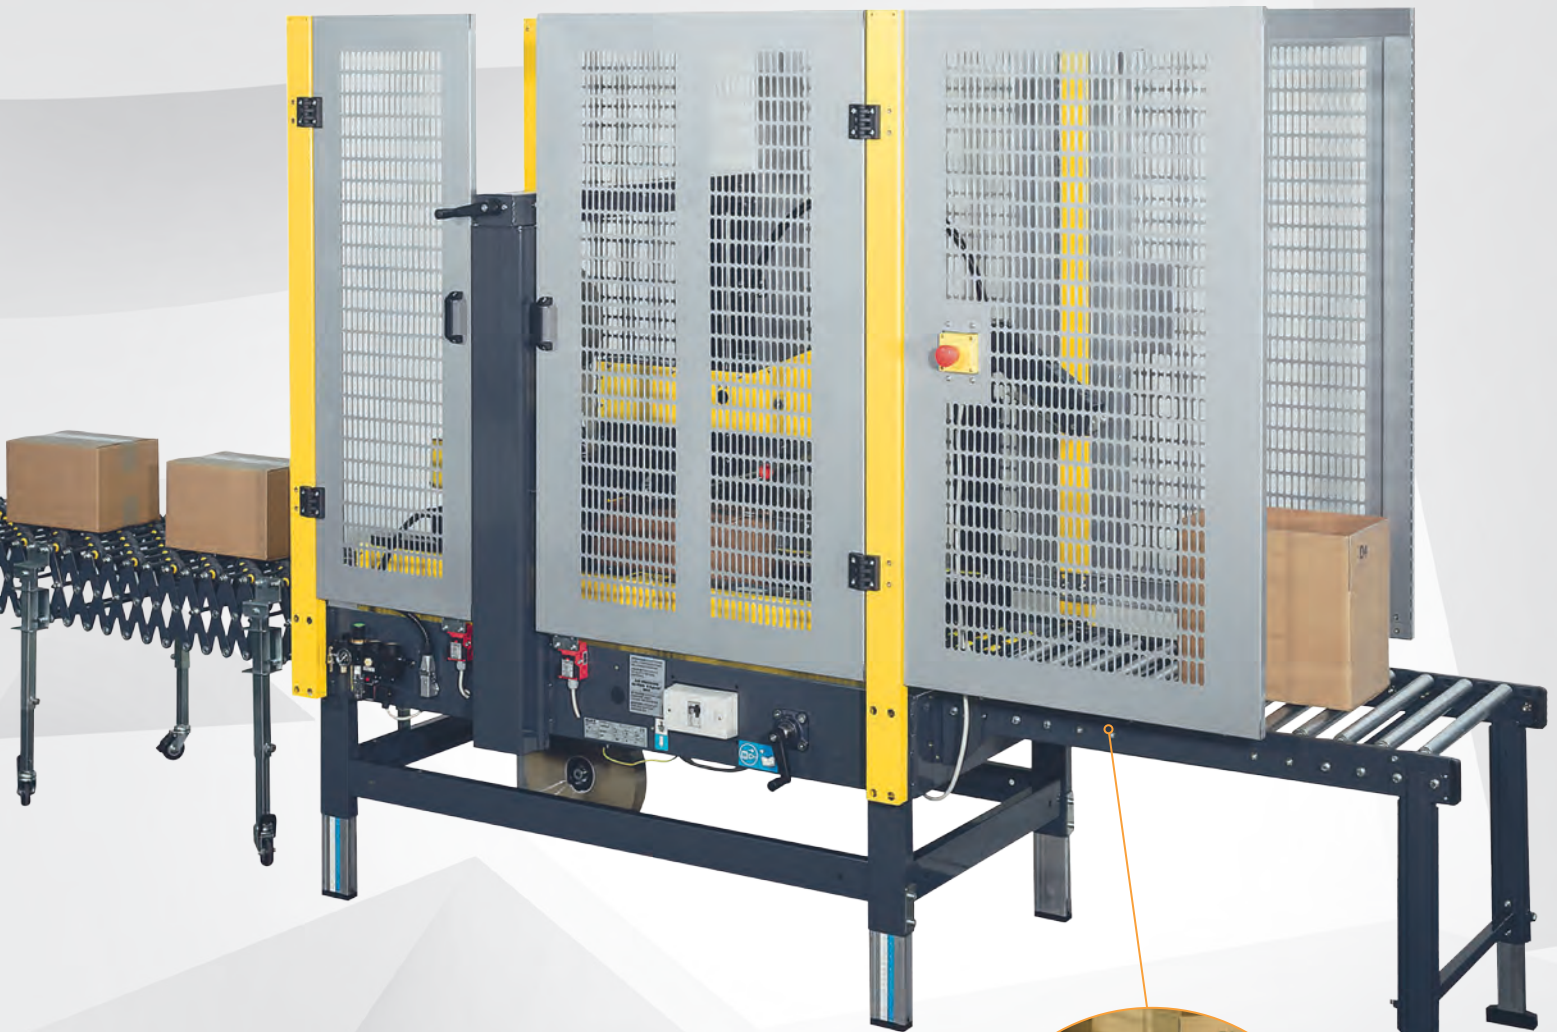

SM11 + AG21 Motorized indexing unit with timer control (Optional)



for more details:



SM11

SM11

SM11 model is an automatic sealing machine with manual adjustment. For this reason, it is used for long production runs with the same box dimensions. The machine is designed to apply automatically a "C" strip of adhesive tape to the top and bottom of boxes. Adjustments and use of SM11 case sealer are intuitive, simple and fast.

SA11 & SA11/4




These machines are supplied with a switch to control the movement of the top taping unit. It is possible thanks to a system of pneumatic pistons.



Low tape/no tape sensor device (Optional)



Automatic top flaps folding device

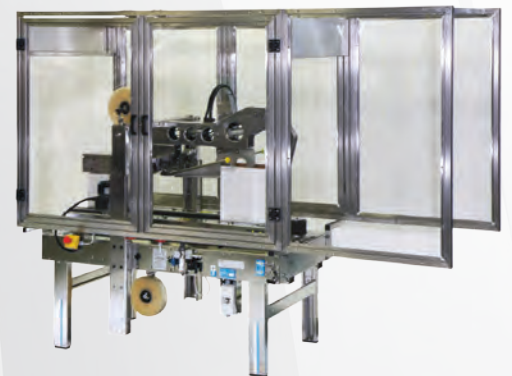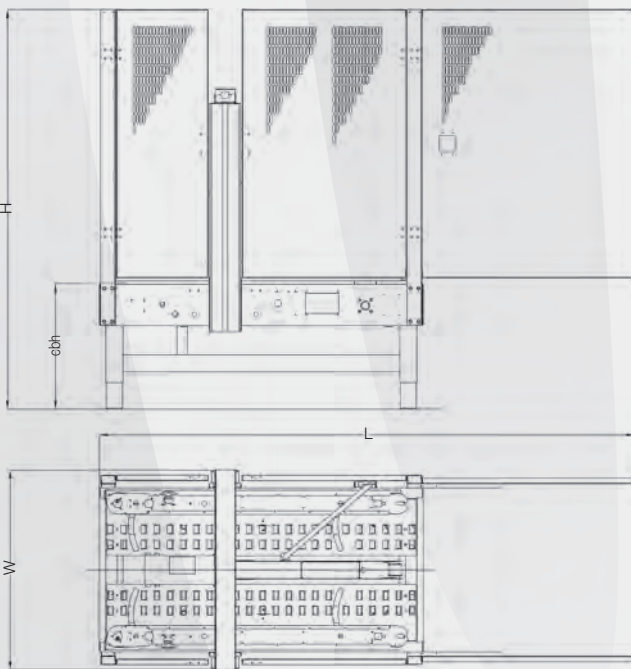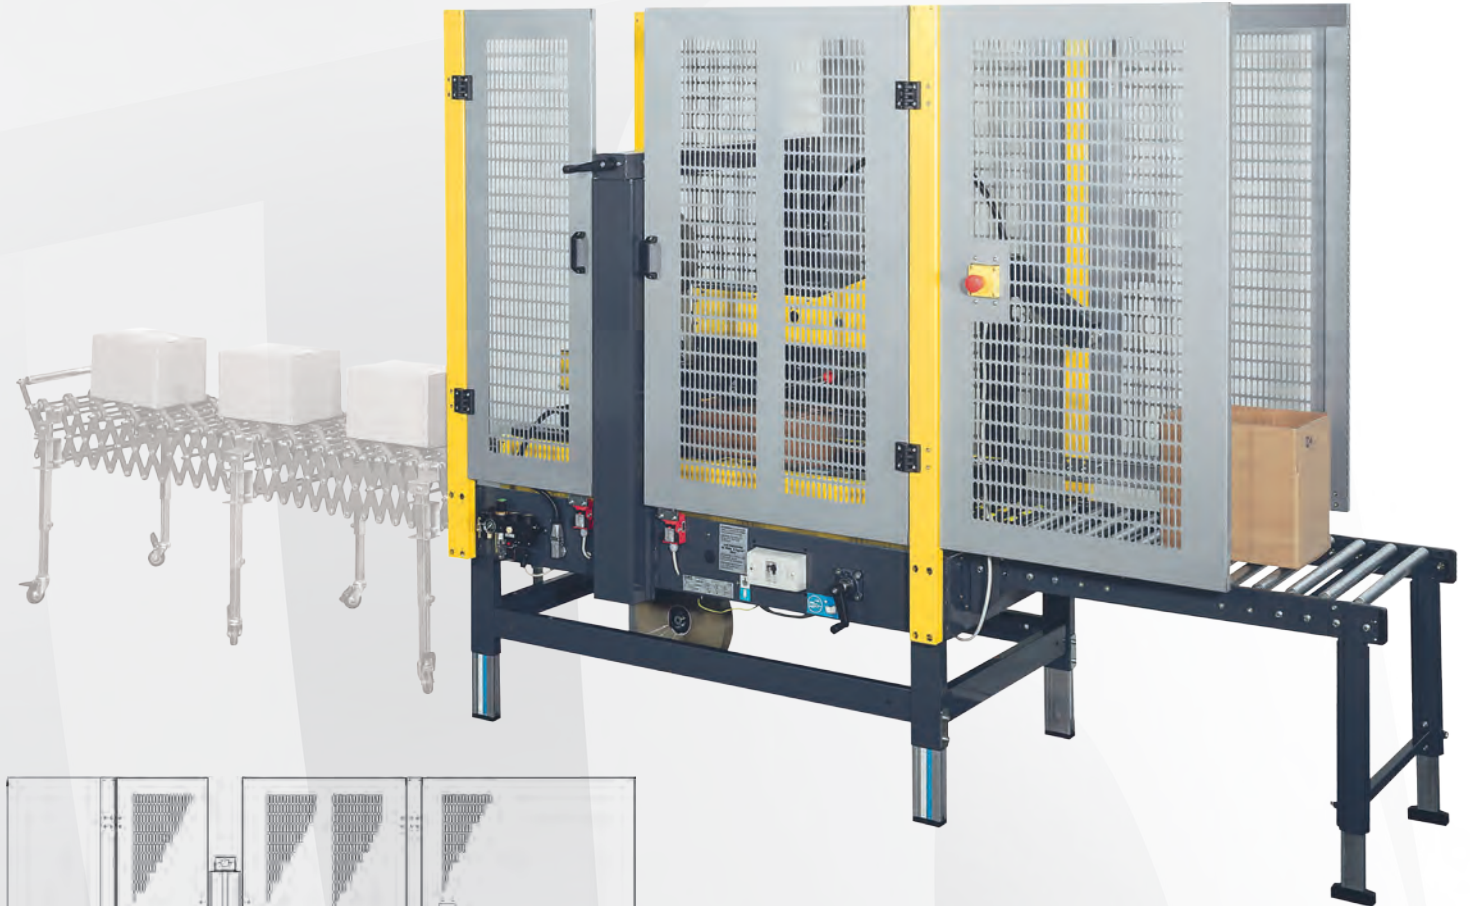

SM11-INOX

Machine suitable for use in high humidity environments or in contact with corrosive substances. Except for the plastic parts, all components of the machine are made of stainless steel.




other languages: www.siat.com




SM116

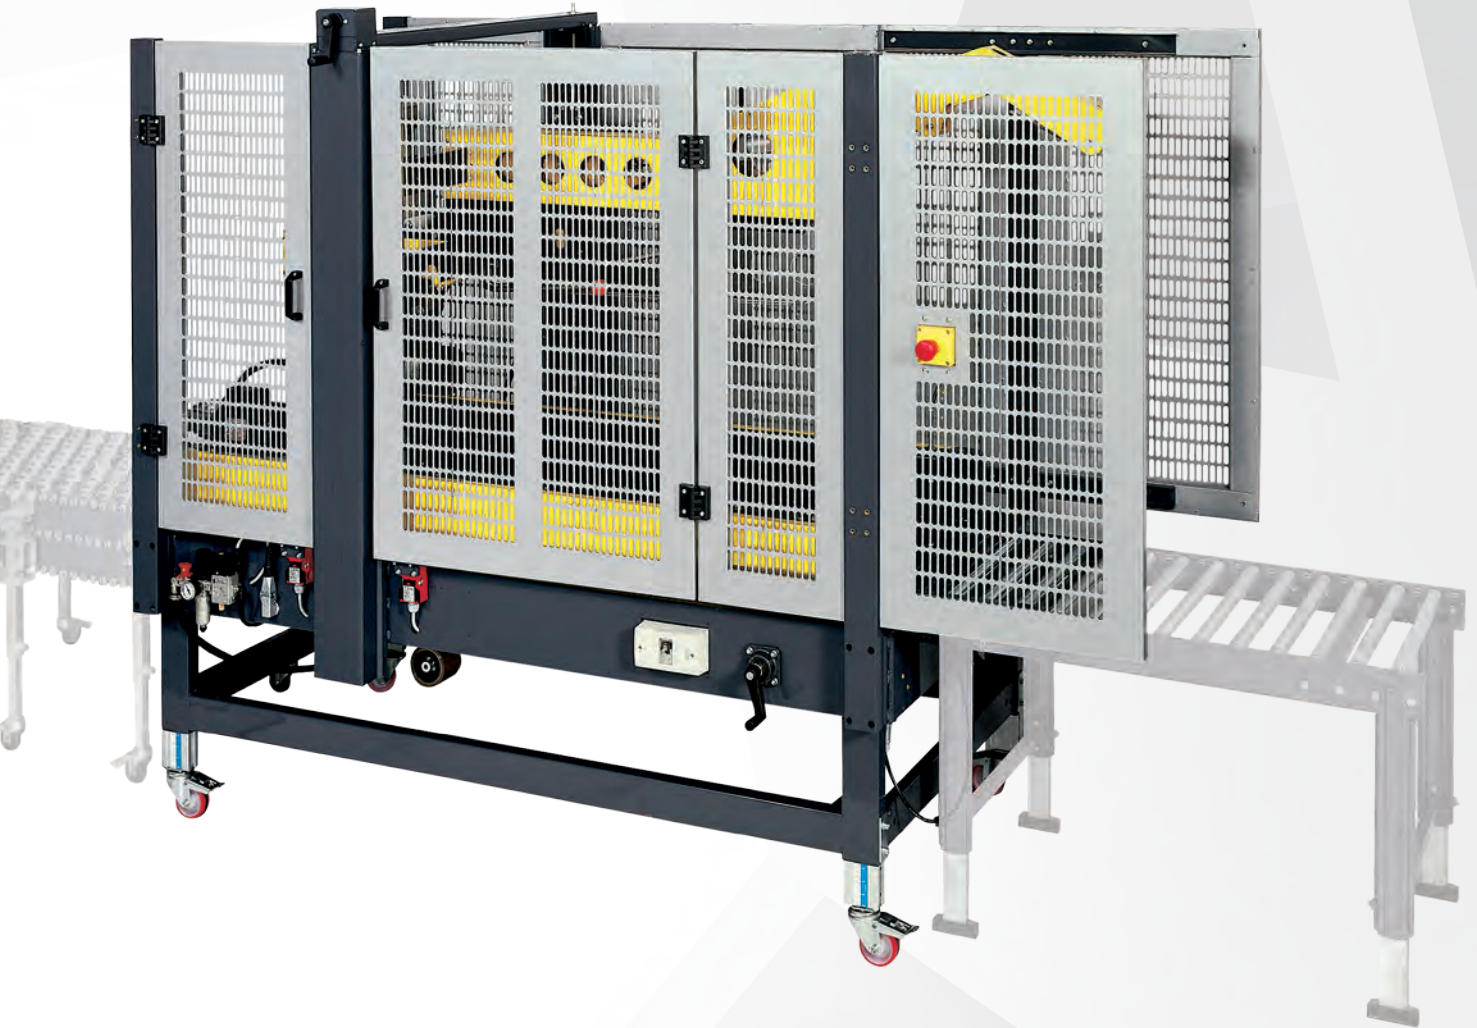


SM116 model is an automatic sealing machine designed for medium and large boxes. It is supplied with K12R taping unit - 75 mm width.

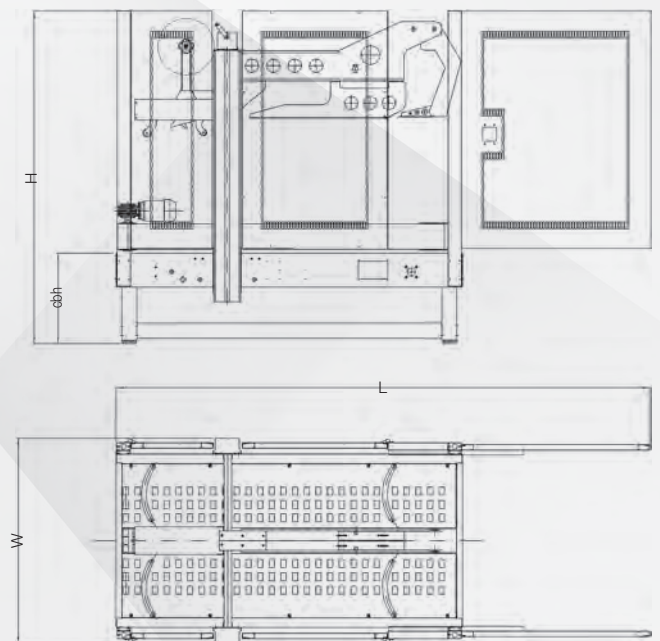

AG21 Motorized indexing unit with timer control (Optional)



> **Machine dimensions**
Dimensioni macchina
Machinemessungen
Dimensions machine
Dimensiones de máquina

Size / Weigth packaging			LxWxH 
> SM11	340	390	160x110x205
> SM11/4	340	390	160x110x205
> SM116	500	615	230x150x215

> **SM11**

	Min.	Max
L	2526	-
W	1058	-
H	1770	2110
cbh	480	820
AS 77	580	920
AS 80	680	1020


> **SM11/4**

	Min.	Max
L	2526	-
W	1058	-
H	1770	2110
cbh	480	820
AS 77	580	920
AS 80	680	1020

> **SM116**

	Min.	Max
L	2834	-
W	1058	-
H	1770	2110
cbh	480	820
AS 77	580	920
AS 80	680	1020

> **Box dimensions**
Dimensioni delle scatole
Kartonabmessungen
Dimensions des boîtes
Dimensiones de cajas

> **SM11**

	K11R / K12R	
	Min.	Max
l	200	600
w	150	500
h	100	600


> **SM11/4**

	K11R	
	Min.	Max
l	200	600
w	105	500
h	100	600

> **SM116**


	K11R / K12R	
	Min.	Max
l	300	900
w	150	650
h	180	700

> **Taping units**
Unità nastranti
Verschliesseinheiten
Unités enrubanneuses
Unidades de precinto



	K11R/ K12R	
	mm	
A	410 Max	
B	50 / 75	
C	76	

> **Production capacity**
Capacità di produzione
Produktionskapazität
Capacité de production
Capacidad de producción




> SM11	Bph
Max pcs.*	1200

> SM11/4	Bph
Max pcs.*	1200

> SM116	Bph
Max pcs.*	900

* Always based on shorter manageable box

> **Air consumption**
Consumo aria
Luftverbrauch
Consommation d'air
Consumo de aire




> SM11	NL.
Cycle	2

> SM11/4	NL.
Cycle	2

> SM116	NL.
Cycle	2

from 5,5 bar to 7 bar

> **Standard voltage**
Voltage standard
Standardspannung
Tension standard
Voltaje estándar



> SM11	
380/400V - 50Hz - 3F	
440V - 60Hz - 3F	
Amps	1,08
Power kW	0,26
Phase	3Ph + PE

> SM11/4	
380/400V - 50Hz - 3F	
440V - 60Hz - 3F	
Amps	1,08
Power kW	0,26
Phase	3Ph + PE


> SM116	
380/400V - 50Hz - 3F	
440V - 60Hz - 3F	
Amps	2
Power kW	0,46
Phase	3Ph + PE

> **Optionals**
Accessori
Zubehör
Accessories
Accesorios

> **AS80**
Higher legs
Set gambe più alte
Höhere Stützen
Pieds plus hauts
Patas más altas




> **AS77**
Casters
Set ruote
Rädchen
Roulettes
Ruedas



> **RG**
Roller conveyor
Piani a rulli
Rollenbahnen
Plans à rouleaux
Rodillos libres



> **GTL - GTR**
Extendable conveyor
Rulliera estensibile
Ausziehbare rollenbahnen
Convoyeur extensible
Rodillos extensibles



> **K-125 / K-250**
Inkjet printer
Stampante ad inchiostro
Tintenstrahldrucker
Marqueur à jet d'encre
Impresora de inyección de tinta

