



SIAT

M. J. MAILLIS GROUP

S8-SK1

Semi Automatic Carton Sealers




Taping unit K11R



S8

SK1



Aluminium telescopic legs



for more details:




S8




SK1

Manual adjustment semi-automatic carton sealer.
Easy to use and simple to adjust, enables every operator to start the production in just minutes.
With the double side driving motorized belt for the transportation of the cases and taping head K11R (50 mm) or K12R (75 mm), allow a perfect closing and sealing of the box.
The machine has been designed and manufactured according to the **CE rules**.

> SK1

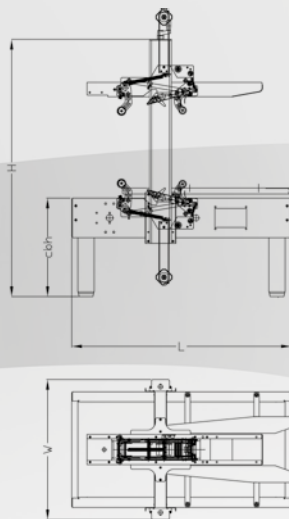

> S8

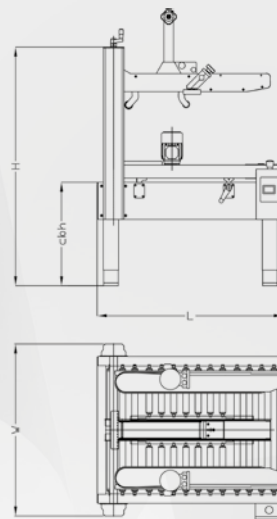

other languages: www.siat.com



> Machine dimensions

Dimensioni macchina
Machinemessungen
Dimensions machine
Dimensiones de la màquina

Size / Weigh packaging			LxWxH
> S8 / S8/4	130	160	106x100x118
> SK1	160	175	114x78x115

> SK1


	Min.	Max
L	1080	-
W	690	-
H	1260	1600
cbh	485	825
AS 77	585	925
AS 80	685	1025

> S8

	Min.	Max
L	975	-
W	900	-
H	1260	1600
cbh	485	825
AS 77	585	925
AS 80	685	1025


> Taping units

Unità nastranti
Verschliesseinheiten
Unité enrubanouse
Unidades de precinto



> Box dimensions

Dimensioni delle scatole
Kartonabmessungen
Dimensions des boîtes
Dimensiones de las cajas



> SK1

	K11R	
	Min.	Max
l	150	∞
w	140	500
h	100	500

> S8 - S8/1

	K11R std. / K12R on demand	
	Min.	Max
l	150	∞
w	120	500
h	100	500

	K11R/ K12R	
	mm	
A	410 Max	
B	50 / 75	
C	76	

> S8/4


	K11R	
	Min.	Max
l	150	∞
w	105	500
h	100	500

> S08

	K11R std. / K12R on demand	
	Min.	Max
l	150	∞
w	105	500
h	50	n.n.

> Production capacity

Capacità di produzione
Produktionskapazität
Capacité de production
Capacidad de producción



> SK1

	Bph
Max pcs.*	1200

> S8

	Bph
Max pcs.*	1200


> S8/4

	Bph
Max pcs.*	1200

* Always based on shorter manageable box

> Standard voltage

Voltaggio standard
Standardspannung
Tension standard
Voltaje estándar



> SK1

380/400V - 50Hz - 3F	
440V - 60Hz - 3F	
Amps	1,54
Power kW	0,13
Phase	3Ph + PE

> S8

380/400V - 50Hz - 3F	
440V - 60Hz - 3F	
Amps	1
Power kW	0,18
Phase	3Ph + PE

> S8/4

380/400V - 50Hz - 3F	
440V - 60Hz - 3F	
Amps	1
Power kW	0,18
Phase	3Ph + PE

> Optionals

Accessori
Zubehör
Accessories
Accesorios


> AS80

Higer legs
Set gambe più alte
Höhere Stützen
Pieds plus hauts
Set patas mas altas




> AS77

Casters
Set ruote
Satz Umlaufräder
Roues
Set ruedas




> RG

Roller conveyor
Piani a rulli Idler
Rollenbahnen
Plans à rouleaux
Tramo de rodillos



> GTL - GTR

Extendable conveyor
Rulliera estensibile
Ausziehbare rollenbahnen
Convoyeur extensible
Rodillos extensibles



> K-125 / K-250

Inkjet printer
Stampante ad inchiostro
Tintenstrahldrucker
Marquer à jet d'encre
Impresora de inyección de tinta

